




(1) default: `xx_gentim2d_startdate = startDate`

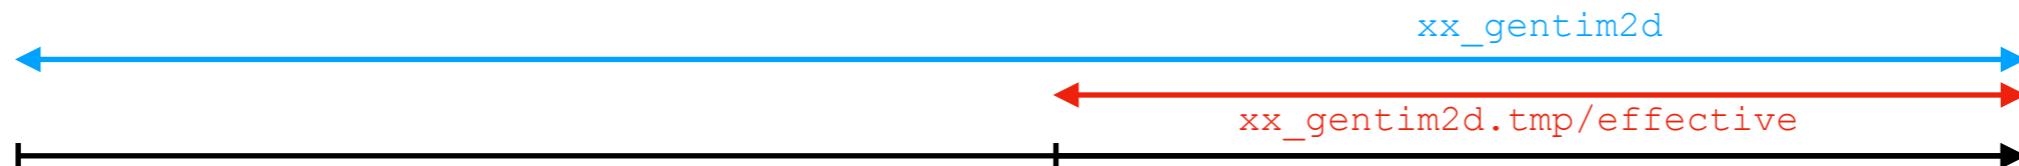

(2) `xx_gentim2d_startdate = baseTime+nIter0`

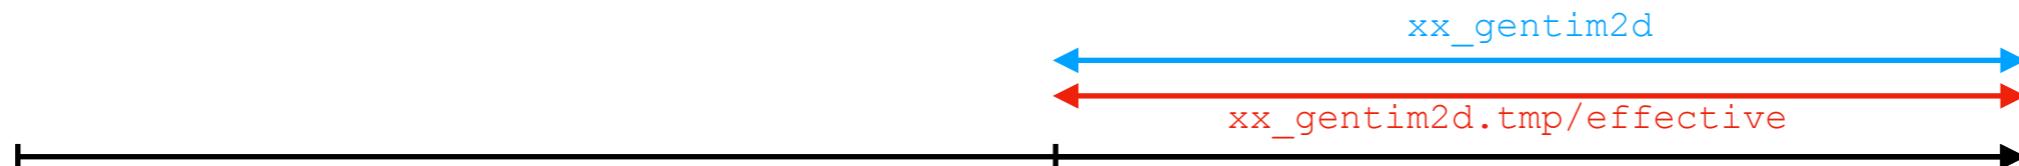

(2a) new startTime at $nIter0^* > nIter0$

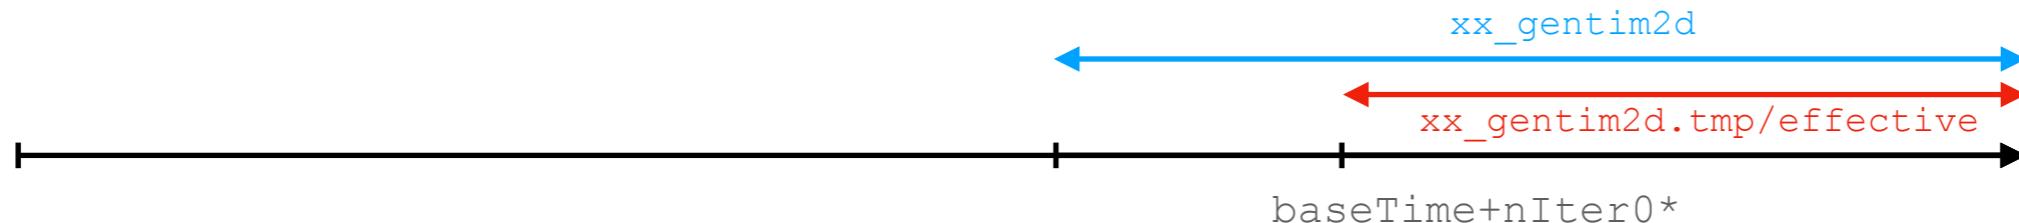

(3) alternative: new `startDate_1/2` at old $baseTime + nIter0 = baseTime^*$.

Note that this requires renaming pickup files and/or specifying namelist parameter "pickupSuff" in data

